

BIO
MICROBICS®



LIXOR®

SUBMERGED AERATION SYSTEM

BioRobic®

SUBMERGED AERATION SYSTEM

Reliable, proven performance
with low maintenance



Delivers highly effective
levels of dissolved oxygen



Non-clogging for complete mixed
activated treatment



AWARD-WINNING
INTEGRATED WATER
TECHNOLOGY

AERATION MANAGEMENT SYSTEMS
SUPPLEMENTAL • EXTENDED

BETTER WATER. BETTER WORLD.®

www.biomicrobics.com

SIMPLE • LOW

LIXOR®

SUBMERGED AERATION SYSTEM

LIXOR® is a remarkably effective submerged aeration and mixing system. Extremely low-maintenance and surprisingly efficient.

The LIXOR's non-clogging, venturi-style chamber, creates the environment for high levels of oxygen transfer efficiency with proper mixing to promote aerobic bacteria and other microorganisms that quickly biodegrade and digest incoming organic matter.

Installed in new or existing tanks, multiple Lixor's may be used to help achieve desired treatment goals. These submerged aeration systems provide the right environment for aerobic bacteria and other microorganisms to quickly biodegrade and digest incoming organic matter as a standalone "Activated Sludge" system (see RollsAIR®) or in various pre- or post- phases of a wastewater treatment system to help achieve desired treatment goals.



HOW IT WORKS!

- 1** Equipped with an above-ground, regenerative blower - the system's only moving part, a continuous large volume of air is piped down to the submerged LIXOR® device(s).
- 2** The velocity of air and water increase substantially inside the LIXOR's venturi chamber creating a vacuum that pulls in surrounding liquid and breaks the incoming air stream into smaller size bubbles.
- 3** The result is a turbulent plume of water and bubbles that travel up through the water, transferring oxygen for biological activity and creating horizontal and vertical mixing patterns.



COST • ROBUST


LIXOR® Specifications

Max. BOD loading per tank volume: 6.7 ppd/kgal* [0.80 Kg/d/m³]

MODEL SIZES	MINIMUM WATER DEPTH	MAXIMUM WATER DEPTH	MAXIMUM AIR RELEASE DEPTH	MAXIMUM TANK VOLUME	HYDRAULIC RETENTION TIME	BOD LOAD Pounds per Day [kg/d/unit]
LIXOR® 0.5	4 ft. [1.2 m]	5.5 ft. [1.7 m]	4.5 ft. [1.4 m]	2000 gal. [7.5 m ³]	10 hours	4.0 lbs [0.5 kg]
LIXOR® 1.0	5 ft. [1.5 m]	7.0 ft. [2.1 m]	6.0 ft. [1.8 m]	3000 gal. [11.3 m ³]	10 hours	6.5 lbs [0.8 kg]
LIXOR® 2.0	5 ft. [1.5 m]	9.0 ft. [2.7 m]	8.0 ft. [2.4 m]	6000 gal. [22.7 m ³]	10 hours	13.0 lbs [1.6 kg]
LIXOR® 3.0	5 ft. [1.5 m]	9.0 ft. [2.7 m]	8.0 ft. [2.4 m]	9000 gal. [34.0 m ³]	10 hours	19.5 lbs [2.3 kg]
LIXOR® 4.0	5 ft. [1.5 m]	9.0 ft. [2.7 m]	8.0 ft. [2.4 m]	12000 gal. [45.4 m ³]	10 hours	26.0 lbs [3.1 kg]
LIXOR® 4.0XD	5 ft. [1.5 m]	12.0 ft. [3.7 m]	11.0 ft. [3.3 m]	12000 gal. [45.4 m ³]	10 hours	26.0 lbs [3.1 kg]
LIXOR® 6.0	5 ft. [1.5 m]	9.0 ft. [2.7 m]	8.0 ft. [2.4 m]	18000 gal. [68.0 m ³]	10 hours	39.0 lbs [4.7 kg]
LIXOR® 6.0XD	5 ft. [1.5 m]	12.0 ft. [3.7 m]	11.0 ft. [3.3 m]	18000 gal. [68.0 m ³]	10 hours	39.0 lbs [4.7 kg]
LIXOR® 8.0	5 ft. [1.5 m]	9.0 ft. [2.7 m]	8.0 ft. [2.4 m]	24000 gal. [91.0 m ³]	10 hours	52.0 lbs [6.2 kg]
LIXOR® 8.0XD	5 ft. [1.5 m]	12.0 ft. [3.7 m]	11.0 ft. [3.3 m]	24000 gal. [91.0 m ³]	10 hours	52.0 lbs [6.2 kg]
LIXOR® 10.0	5 ft. [1.5 m]	9.0 ft. [2.7 m]	8.0 ft. [2.4 m]	30000 gal. [114.0 m ³]	10 hours	65.0 lbs [7.8 kg]
LIXOR® 10.0XD	5 ft. [1.5 m]	12.0 ft. [3.7 m]	11.0 ft. [3.3 m]	30000 gal. [114.0 m ³]	10 hours	65.0 lbs [7.8 kg]
LIXOR® 12.0	5 ft. [1.5 m]	9.0 ft. [2.7 m]	8.0 ft. [2.4 m]	36000 gal. [136.0 m ³]	10 hours	78.0 lbs [9.4 kg]
LIXOR® 12.0XD	5 ft. [1.5 m]	12.0 ft. [3.7 m]	11.0 ft. [3.3 m]	36000 gal. [136.0 m ³]	10 hours	78.0 lbs [9.4 kg]
LIXOR® 16.0	5 ft. [1.5 m]	9.0 ft. [2.7 m]	8.0 ft. [2.4 m]	48000 gal. [182.0 m ³]	10 hours	104.0 lbs [12.5 kg]
LIXOR® 16.0XD	5 ft. [1.5 m]	12.0 ft. [3.7 m]	11.0 ft. [3.3 m]	48000 gal. [182.0 m ³]	10 hours	104.0 lbs [12.5 kg]
LIXOR® 20.0	5 ft. [1.5 m]	9.0 ft. [2.7 m]	8.0 ft. [2.4 m]	60000 gal. [227.0 m ³]	10 hours	130.0 lbs [15.6 kg]
LIXOR® 20.0XD	5 ft. [1.5 m]	12.0 ft. [3.7 m]	11.0 ft. [3.3 m]	60000 gal. [227.0 m ³]	10 hours	130.0 lbs [15.6 kg]
LIXOR® 24.0	5 ft. [1.5 m]	9.0 ft. [2.7 m]	8.0 ft. [2.4 m]	72000 gal. [273.0 m ³]	10 hours	156.0 lbs [18.7 kg]
LIXOR® 24.0XD	5 ft. [1.5 m]	12.0 ft. [3.7 m]	11.0 ft. [3.3 m]	72000 gal. [273.0 m ³]	10 hours	156.0 lbs [18.7 kg]
LIXOR® 32.0	5 ft. [1.5 m]	9.0 ft. [2.7 m]	8.0 ft. [2.4 m]	96000 gal. [364.0 m ³]	10 hours	208.0 lbs [25.0 kg]
LIXOR® 32.0XD	5 ft. [1.5 m]	12.0 ft. [3.7 m]	11.0 ft. [3.3 m]	96000 gal. [364.0 m ³]	10 hours	208.0 lbs [25.0 kg]

*ppd/kgal: 1 pound per day per 1000 gallons = 0.12 kilograms per day per cubic meters.

In the interest of technological progress, all LIXOR® submerged aeration systems are subject to design and/or materials change without notice.

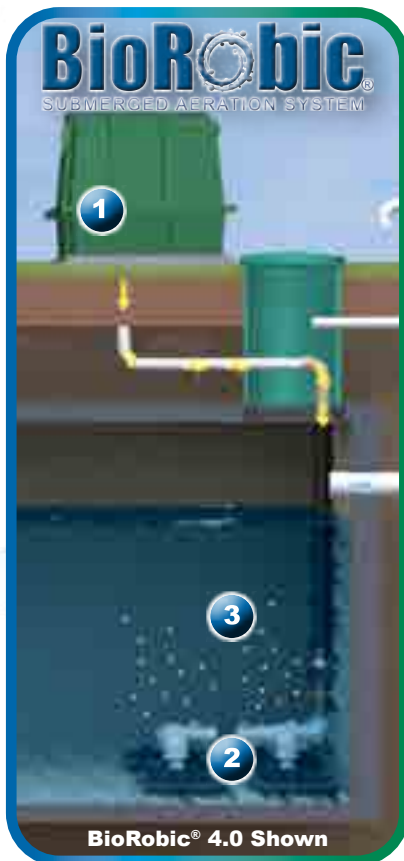

BioRobic® 4.0 Shown

Ideal for use with BioBarrier® HSMBR® system such as Winery Wastewater Treatment Applications

HOW IT WORKS!

- 1 Equipped with an above-ground, regenerative blower - the system's only moving part, a continuous large volume of air is piped down to the submerged BioRobic® device(s).
- 2 This air stream from the blower travels through the orifices of the BioRobic®. The results in the breaking of the incoming air stream into smaller size bubbles.
- 3 The result is a turbulent plume of water and bubbles that travel up through the water, transferring oxygen for biological activity and creating horizontal and vertical mixing patterns.

BioRobic® Submerged Aeration System Specifications

MODEL SIZES	MINIMUM WATER DEPTH	MAXIMUM WATER DEPTH	MAXIMUM AIR RELEASE DEPTH	BOD LOAD Pounds per Day [kg/d/unit]
BioRobic 1.0	5 ft. [1.5 m]	8 ft. [2.4 m]	8 ft. [2.4 m]	5 lbs [2.7 kg]
BioRobic 2.0	5 ft. [1.5 m]	8 ft. [2.4 m]	8 ft. [2.4 m]	10 lbs [4.5 kg]
BioRobic 3.0	5 ft. [1.5 m]	8 ft. [2.4 m]	8 ft. [2.4 m]	15 lbs [6.8 kg]
BioRobic 4.0	5 ft. [1.5 m]	8 ft. [2.4 m]	8 ft. [2.4 m]	20 lbs [9.1 kg]
BioRobic 6.0	5 ft. [1.5 m]	8 ft. [2.4 m]	8 ft. [2.4 m]	30 lbs [13.6 kg]
BioRobic 8.0	5 ft. [1.5 m]	8 ft. [2.4 m]	8 ft. [2.4 m]	40 lbs [18.1 kg]

In the interest of technological progress, all BioRobic® Submerged Aeration Devices are subject to design and/or materials change without notice.



Established in 1996 to focus on water ecology and technology innovation through three companies, BioMicrobics, SeptiTech, and Scienco/FAST are at the forefront of sustainable design and with more than 80,000 installed systems in over 80 countries. Our systems meet the highest performance standards for

treatment of water, greywater, wastewater, stormwater, and more! BioMicrobics has developed a number of innovative products dealing with the treatment of water where centralized infrastructure and drainage are not desired. Our systems are designed and engineered with sustainability and user practicality in mind.

LIXOR BioRobic

SUBMERGED AERATION SYSTEM SUBMERGED AERATION SYSTEM

WHY USE SUPPLEMENTAL AERATION SYSTEM?

- Maintain uniform dispersion of microorganisms.
- Provide proper mixing of both hydraulic and BOD loadings
- Efficiency of oxygen transfer to lower power and operating costs.
- Provide the right environment for aerobic bacteria to help achieve desired treatment goals.



Often, BioMicrobics Systems are installed in below ground, locally-sourced tanks.



“Onsite systems provide a cost-effective, long-term option for treating wastewater, particularly in sparsely populated areas. When properly installed, operated, and maintained, these systems help protect public health, preserve valuable water resources, and maintain a community’s economic vitality.” ~ U.S. EPA, SepticSmart Initiative

INNOVATIVE ONSITE WASTEWATER PRODUCTS

BIO MICROBICS
BETTER WATER. BETTER WORLD.
16002 West 110th St. • Lenexa, KS 66219 USA
1-800-753-3278 • ph: 1-913-422-0707 • f: 1-913-422-0808
www.biomicrobics.com • sales@biomicrobics.com

SCIENCO/FAST
a subsidiary of BioMicrobics, Inc.
12977 Maurer Indust'l Dr • Sunset Hills, MO 63127 USA
1-800-652-4539 • p: +1(314)756-9300 • f: 1(314)756-9306
www.sciencofast.com • solutions@sciencofast.com

SeptiTech
a subsidiary of BioMicrobics, Inc.
69 Holland Street • Lewiston, ME 04240 USA
1-800-318-7967 • ph: 1-207-333-6940 • f: 1-207-333-6944
www.septitech.com • info@septitech.com

SCIENCO/FAST
Scienco® InTank® Division - Texas Office
30525 First Street Suite A • Fulshear TX 77441 USA
Mobile (24hr) : +1 (832) 640-9221 • f: +1 (314) 756-9306
www.intankballast.com • intank@sciencofast.com

www.biomicrobics.com